




Wall Mount

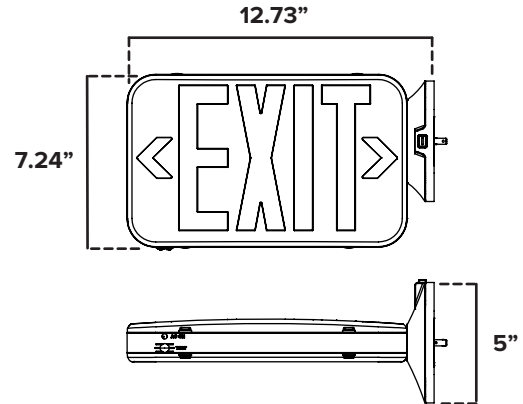

Features

- LED Exit Sign
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- Single or double faces (Universal)
- Mounting option– side or wall mounted
- Fully assembled and pre-wired with SkyPlug – ready for plug-in installation
- 120VAC operation
- Ultra bright RED and GREEN LEDs in one unit
- Built-in 1.2V 1000mAh Ni-Cd battery for minimum 90 minutes emergency operation
- Weight: 3.31 LBS
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- 0° to 40°C indoor damp location listed
- Suitable for damp location
- Five years warranty for the electrical parts and housing
- Three years warranty for battery
- Warranty: www.skyplug.com/warranty

Green Panel (Included in box)



Certifications



Materials

Panel	ABS
Panel Finish	White w/ Red letters
Panel Sign	Single or double sided - pre-installed with red panel and extra green panel included in box
Body	ABS
Body Finish	White

Electrical Information

Model #	Description	Rated Voltage	Input Current	Input Wattage	LED Type
3276-SM	Single or Double Sided	120V	0.02A	0.9W	Red and Green - Super Bright, Long Life LED

SkyPlug Installation System

Rating	Damp
Luminaire Support	Max. 50 lbs
SkyOutlet	Model: 1005-1 (SR-3L) Suitable for solid copper wire 12 Awg and 14 Awg
SkyPlug	Model: SPU-3L Suitable for 18 Awg
Compatible Electric Box	For use in round, octagonal, metal, plastic, and pancake outlet boxes - min 4"x 1/2"

