


Wall Mount

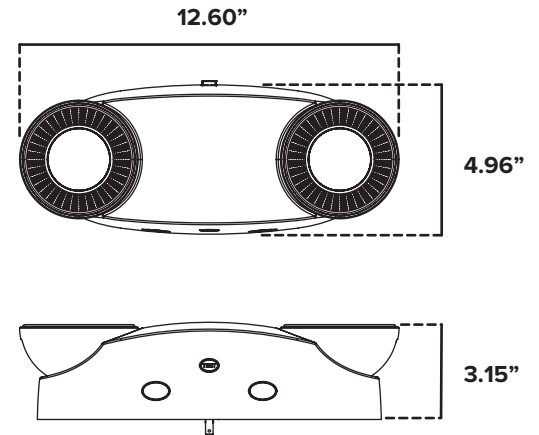

Features

- LED Emergency Fixtures
- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Panel Finish: White with 2 LED heads
- Innovative, easy installation in minutes
- Suitable for wall mount applications
- Fully assembled and pre-wired with SkyPlug – ready for plug-in installation
- 120VAC operation
- 2X6W Super bright LED lamp heads for emergency mode, provide more than 650Lm output per head
- Built-in 6V 5AH Lead Acid battery for minimum 90 minutes emergency operation
- Weight: 3.89 LBS
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- 0° to 40°C indoor damp location listed
- Five years warranty for the electrical parts and housing
- Two years warranty for battery
- Warranty: www.skyplug.com/warranty

Additional Images



Certifications



Materials

Panel	ABS
Panel Finish	White w/ 2 LED heads
Panel Sign	N/A
Body	ABS
Body Finish	White

Electrical Information

Model #	Rated Voltage	Input Current	Input Wattage	LED Type	Charging Time	Emergency Run Time
3279	120V	0.054-0.036A	1W	2X6W Super Bright LEDs	24 Hrs	90 Mins

SkyPlug Installation System

Rating	Damp
Luminaire Support	Max. 50 lbs
SkyOutlet	Model: 1005-1 (SR-3L) Suitable for solid copper wire 12 Awg and 14 Awg
SkyPlug	Model: SPU-3L Suitable for 18 Awg
Compatible Electric Box	For use in round, octagonal, metal, plastic, and pancake outlet boxes - min 4"x 1/2"

